


# TSM

TUBULAR SPECIALTIES MFG., INC.



13011 S. SPRING ST., LOS ANGELES, CA 90061-1685 • 213/515-4801 TOLL FREE 800/421-2961 CA ONLY 800/521-7548  
 DESIGNER SERVICE: 7:00 A.M. TO 5:00 P.M. PACIFIC TIME • TELEX II: 910-346-6362 • FAX: 213/217-0653

# DS-724

Model # DS 724  
 Model # DS 736

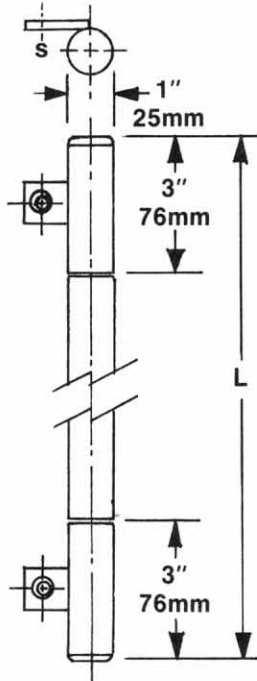

Model #DS-724HM  
 Model #DS-736HM

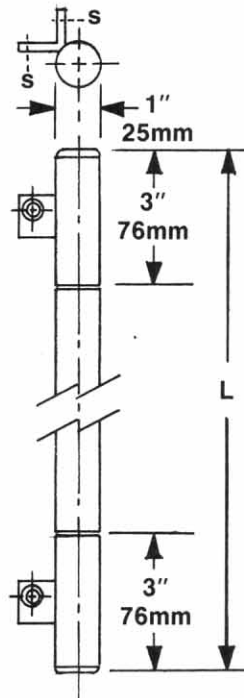

## DOOR FRAME SAVER



### DESIGN CONSIDERATIONS

• TSM's Door Frame Saver was designed in response to many requests from hospitals for a product to help them protect door frames from wheeled vehicles such as gurneys, food carts, beds and wheelchairs. Not only is it attractive, but it soon pays for itself by reducing the cost of repairing and repainting damaged door frames.

### MODEL NUMBERS (select one)

See chart below for description of model numbers.

- |                                   |                                   |
|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> DS-724   | <input type="checkbox"/> DS-736   |
| <input type="checkbox"/> DS-724HM | <input type="checkbox"/> DS-736HM |



### OPERATION

Center section of unit swivels to deflect force of object banging against door frame.



### SUGGESTED ARCHITECTURAL SPECIFICATION

TSM model \_\_\_\_\_ (fill in model number) Door Frame Saver from Tubular Specialties Manufacturing, Inc., Los Angeles, California, (213) 515-4801. Tubing: stainless steel Type 304 (18-8) 1" (25mm) O.D. x 18 gauge (1.2mm) x \_\_\_\_\_ (24" [610mm] or 36" [914mm]). Construction: three sections are joined together with internal dowels; center section swivels to protect door frame. Installation Hardware: 3/4" (19mm) stainless steel screws.



### MATERIALS/WORKMANSHIP

**Tubing**—Stainless steel Type 304 (18-8) 1" (25mm) x 18 gauge (1.2mm), satin finish.

**Internal Dowel**—Stainless steel Type 304 (18-8) 7/8" (22mm) x 18 gauge (1.2mm).

**Mounting Tabs**—Stainless steel Type 304 (18-8) 8 gauge (4.2mm) with 1/4" (6mm) countersunk screw holes. DS-724 tabs are straight; DS-724HM tabs are formed at 90° to accommodate hollow metal doors. Welded to tubing.



### INSTALLATION

Door Frame Saver is surface mounted with screws provided by manufacturer at locations marked by an "S" (see Installation, Reference Section C, for various applications).

Model Numbers for Door Frame Saver

		Type of Door	
Length		Wood Frame	Hollow Metal
	24"	DS-724	DS-724HM
	36"	DS-736	DS-736HM